


# PRODUCT DATA SHEET

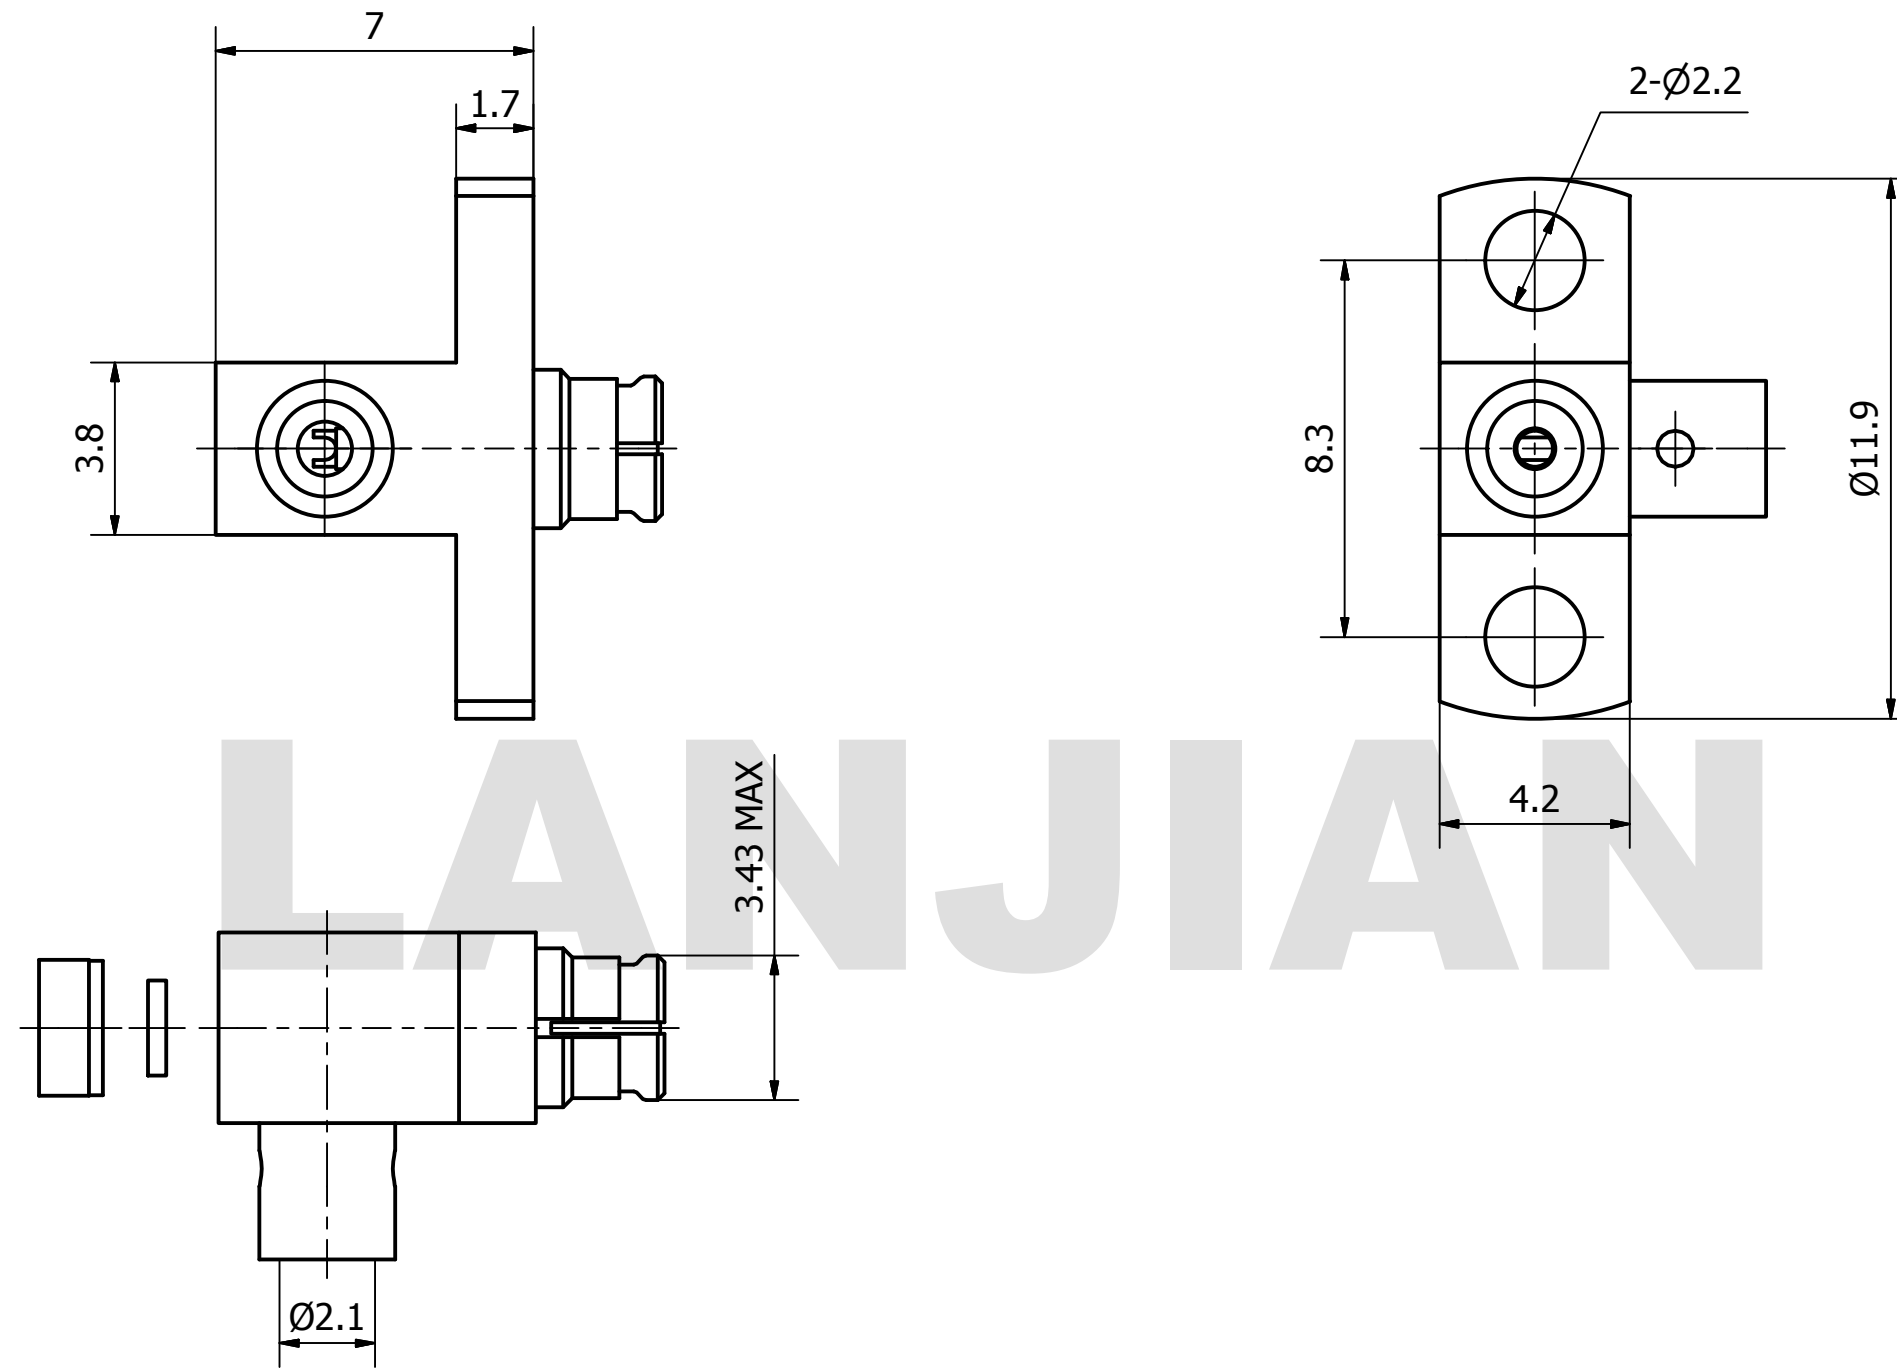

**MATERIAL:**  
 BODY: BERYLLIUM COPPER PER ASTM B196.  
 ALLOY NO. UNS C17300  
 CONTACT: BERYLLIUM COPPER PER ASTM B196.  
 ALLOY NO. UNS C17300  
 INSULATOR: PTFE

**PERFORMANCE:**  
 IMPEDANCE: 50 OHMS  
 FREQUENCY: DC TO 40 GHz  
 VSWR:  $\leq 1.50$

THIS DOCUMENT CONTAINS CONFIDENTIAL AND PROPRIETARY INFORMATION THAT CANNOT BE REPRODUCED OR DIVULGED, IN WHOLE OR IN PART, WITHOUT WRITTEN AUTHORIZATION FROM "LANJIAN ELECTRONICS"	MATERIAL :			<b>LANJIAN ELECTRONICS</b> 38 Hengtong Road, Xinqu Dingmao Zhenjiang, 212009, Jiangsu, P. R. China	
	UNLESS OTHERWISE SPECIFIED: DIMENSIONS IN MM				
	TOLERANCES :				
	X.X	$\pm 0.20$	ANGULAR : $\pm 1^\circ$	DEBURR AND BREAK SHARP EDGES	
	X.XX	$\pm 0.10$	FILLETS R/C : $\pm 0.10$		
X.XXX	$\pm 0.01$	SURFACE FINISH : Ra 1.6			
	NAME	DATE	SIGNATURE	TITLE <b>SMP-KWF3506 R/A connector</b>	
DRAWN					
CHK'D					
APPV'D					
MFG				DWG No.	REV.
PROJECTION		SIZE	SCALE	DO NOT SCALE THE DRAWING	
		A3	6: 1	PAGE 1 / 1	