



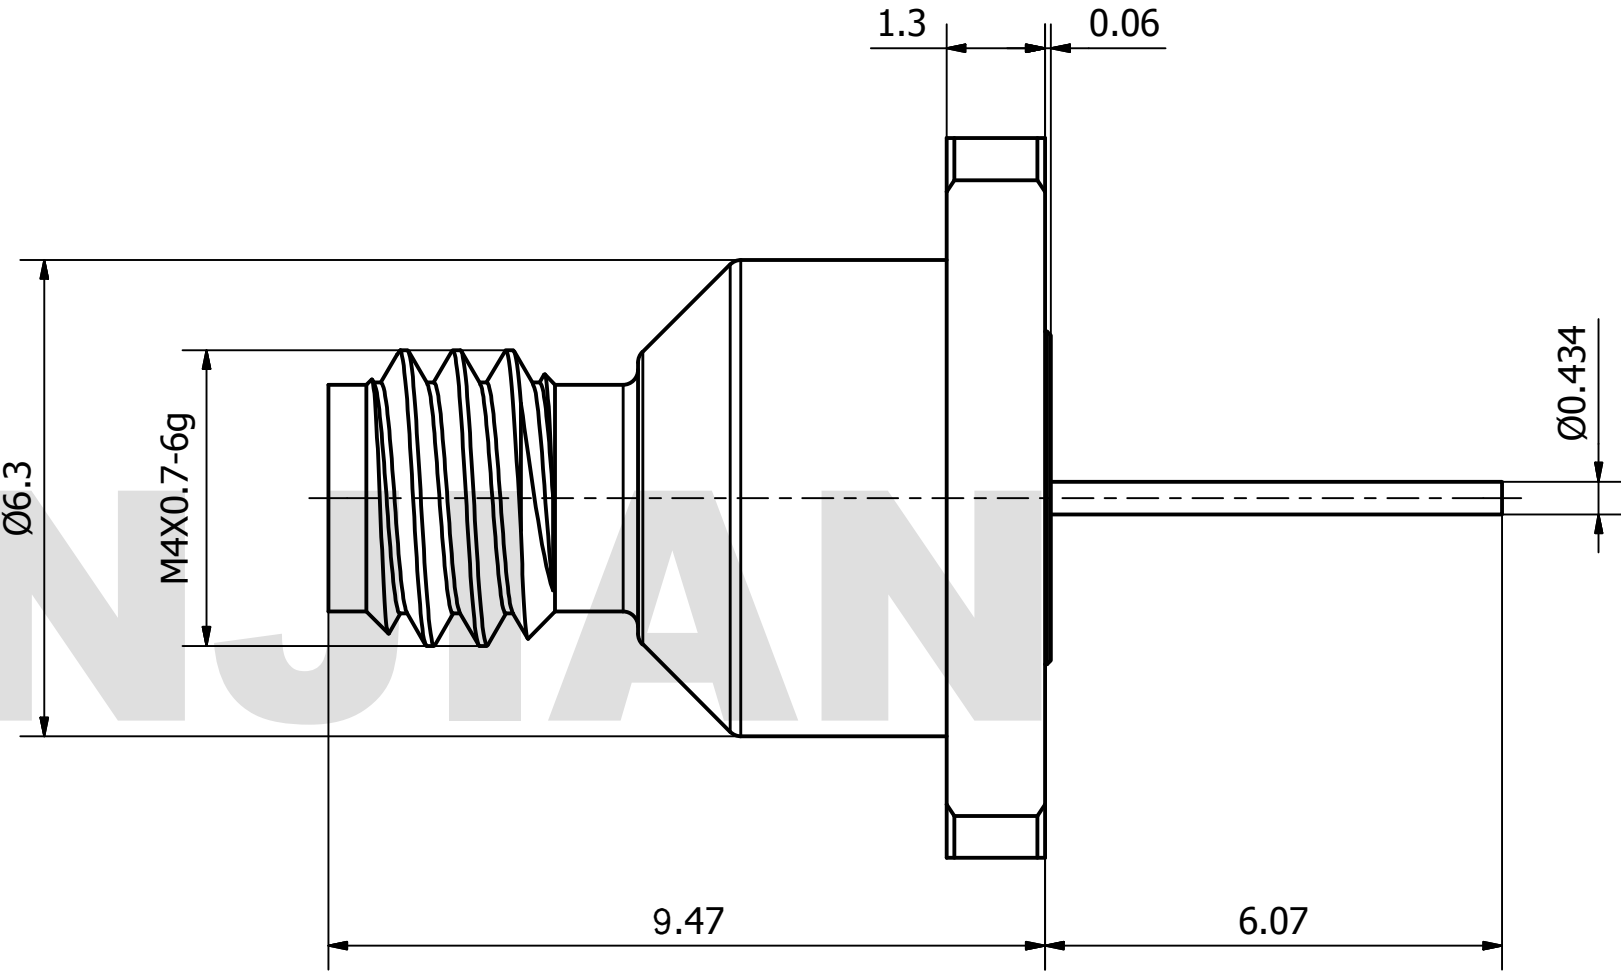

PRODUCT DATA SHEET

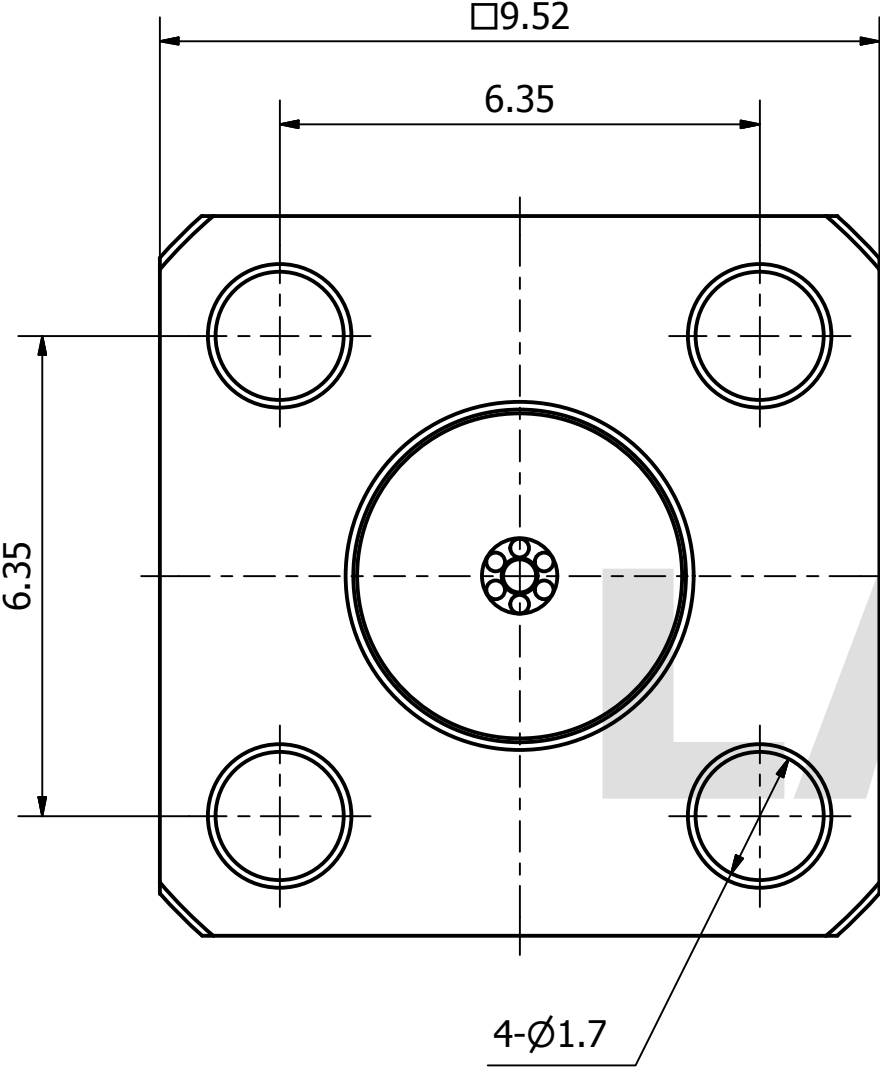

MATERIAL:
BODY: STAINLESS STEEL PER AMS-5640,
ALLOY UNS S30300
CONTACT: BERYLLIUM COPPER PER ASTM B196.
ALLOY NO. UNS C17300
INSULATOR: PEI

PERFORMANCE:
IMPEDANCE: 50 OHMS
FREQUENCY: DC TO 110 GHz
VSWR: ≤1.50

THIS DOCUMENT CONTAINS CONFIDENTIAL AND PROPRIETARY INFORMATION THAT CANNOT BE REPRODUCED OR DIVULGED, IN WHOLE OR IN PART, WITHOUT WRITTEN AUTHORIZATION FROM "LANJIAN ELECTRONICS"	MATERIAL :				<div>LANJIAN  ELECTRONICS</div> <div>38 Hengtong Road, Xinqu Dingmao Zhenjiang, 212009, Jiangsu, P. R. China</div>	
	UNLESS OTHERWISE SPECIFIED: DIMENSIONS IN MM					
	TOLERANCES :					
	X.X	± 0.20	ANGULAR : ± 1°	DEBURR AND BREAK SHARP EDGES		
	X.XX	± 0.10	FILLETS R/C : ± 0.10			
	X.XXX	± 0.01	SURFACE FINISH : Ra 1.6			
		NAME	DATE	SIGNATURE		
	DRAWN	Y.J.	11/16/2019			
	CHK'D	X.C.W	11/16/2019			
	APPV'D	X.C.W	11/16/2019			
MFG						
PROJECTION		SIZE	SCALE		DWG No.	REV.
		A3	10 : 1		GCPZ3.660.V.017	A
DO NOT SCALE THE DRAWING					PAGE 1 / 1	