


PRODUCT DATA SHEET

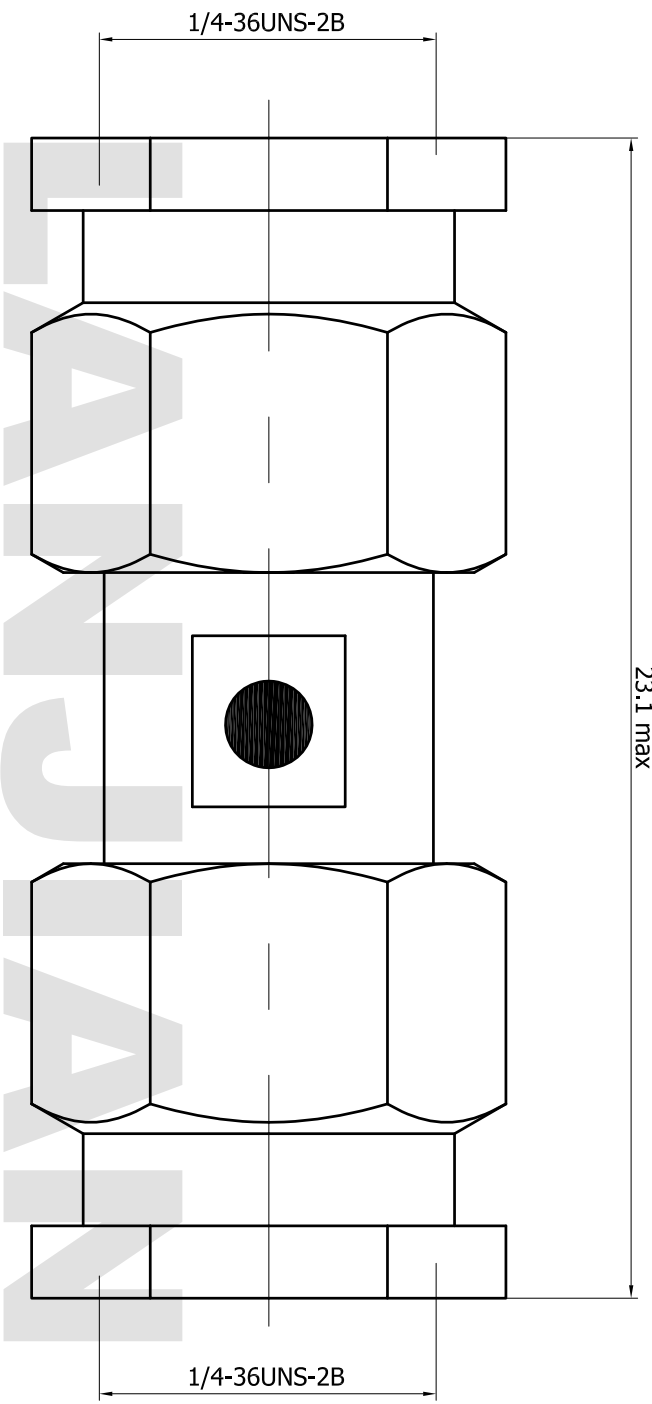

材料：
 外壳： 不锈钢 按AMS-5640, UNS S30300
 导体： 铍青铜 按ASTM B-196 COND. TDO4, UNS C17300
 绝缘子： 聚四氟乙烯棒 按ASTM D1710

性能：
 阻抗： 50 OHMS
 频率： DC-26.5 GHz
 电压驻波比： ≤ 1.15 (DC-18GHz)
 ≤ 1.20 (18-26.5GHz)

THIS DOCUMENT CONTAINS CONFIDENTIAL AND PROPRIETARY INFORMATION THAT CANNOT BE REPRODUCED OR DIVULGED, IN WHOLE OR IN PART, WITHOUT WRITTEN AUTHORIZATION FROM "LANJIAN ELECTRONICS"

MATERIAL :		UNLESS OTHERWISE SPECIFIED: DIMENSIONS IN MM	
TOLERANCES :	XX ±0.20	ANGULAR : ±1°	DEBURR AND BREAK SHARP EDGES
	XXX ±0.10	FILLETS R/C : ±0.10	
	X.XXX ±0.01	SURFACE FINISH : Ra 1.6	
NAME	DATE	SIGNATURE	
DRAWN			
CHKD			
APPRVD			
MFG			
PROJECTION	SIZE	SCALE	
	A3	6:1	

LANJIAN ELECTRONICS
 38 Hengtong Road, Xinqu Dingmao
 Zhenjiang, 212009, Jiangsu, P. R. China

TITLE
SMA-50JJ-2 adaptor

DWG No. GCPZ3.640.A.010
 DO NOT SCALE THE DRAWING

REV. 1 / 1