


# PRODUCT DATA SHEET

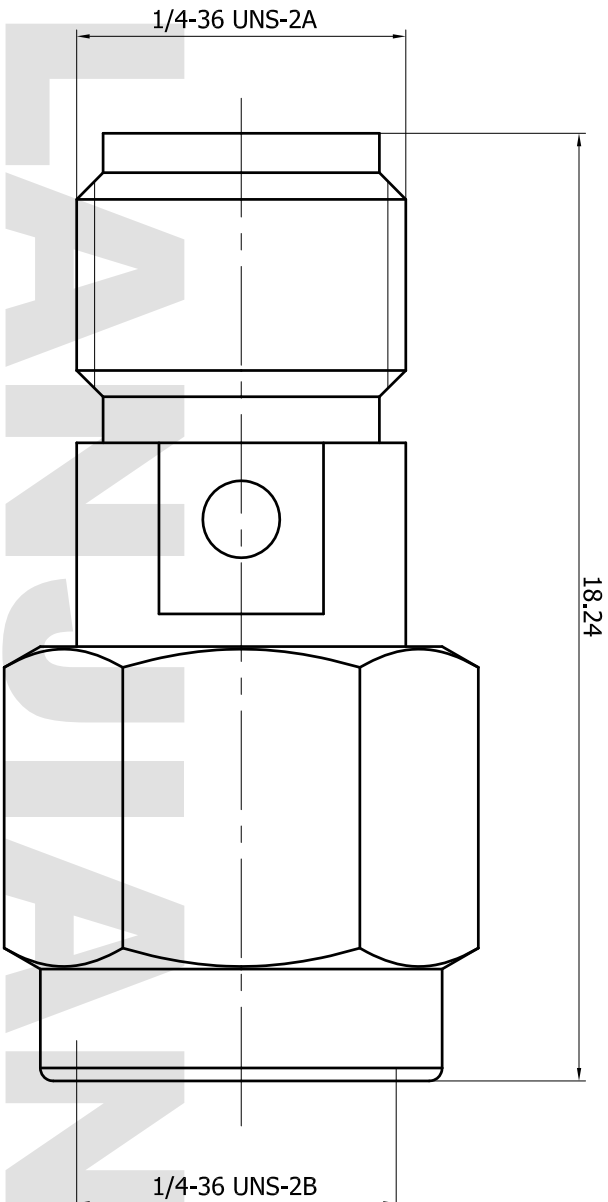

材料: 不锈钢 按AMS-5640, UNS S30300  
外壳: 镀青铜 按ASTM B-196 COND. TDO4, UNS C17300  
导体: 聚四氟乙烯棒 按ASTM D1710  
绝缘子:

性能:  
阻抗: 50 OHMS  
频率: DC-26.5 GHz  
电压驻波比:  $\leq 1.15$  (DC-18GHz)  
 $\leq 1.20$  (18-26.5GHz)

THIS DOCUMENT CONTAINS CONFIDENTIAL AND PROPRIETARY INFORMATION THAT CANNOT BE REPRODUCED OR DIVULGED, IN WHOLE OR IN PART, WITHOUT WRITTEN AUTHORIZATION FROM "LANJIAN ELECTRONICS".

MATERIAL :		UNLESS OTHERWISE SPECIFIED: DIMENSIONS IN MM	
TOLERANCES :			
X.X	$\pm 0.20$	ANGULAR :	$\pm 1^\circ$
X.XX	$\pm 0.10$	FILETS R/C :	$\pm 0.10$
X.XXX	$\pm 0.01$	SURFACE FINISH :	Ra 1.6
NAME		DATE	SIGNATURE
DRAWN			
CHKD			
APPR'D			
MFG			
PROJECTION		SIZE	SCALE
		A3	6:1

**LANJIAN ELECTRONICS**

38 Hengtong Road, Xinqiu Dingmao  
Zhenjiang, 212009, Jiangsu, P. R. China

TITLE  
**SMA-50JK adaptor**

DWG No.  
GCPZ3.640.A.012  
DO NOT SCALE THE DRAWING

REV.

1 / 1